


Type	Width [mm]	Height [mm]	Depth frø wall [mm]	Cønnections spacing [mm]	Cønnections distance frø the wall [mm]	Brackets spacing [mm]	Heating surface [m <sup>2</sup> ]	Weight [kg]	Capacity [dm <sup>3</sup> ]	Pøwer ΔT=50K (75/65/20 °C) [W]	Pøwer ΔT=46K (75/65/24 °C) [W]	Pøwer ΔT=30K (55/45/20 °C) [W]	Electric heater maximum power [W]
	W	H	D	C	B	A							
F0005020818013010000	502	818	97-102	406	52-57	432	0,68	8,3	4,0	424	382	224	300
F0005021238013010000	502	1238	97-102	406	52-57	432	1,06	12,7	6,2	645	582	343	600
F0005021742013010000	502	1742	97-102	406	52-57	432	1,53	18,1	8,9	923	831	486	900
F0005950818013010000	595	818	106-111	500	52-57	525	0,79	9,3	4,5	486	438	256	300
F000595081801B010000	595	818	106-111	50	95-100	525	0,79	9,4	4,5	486	438	256	300
F0005951238013010000	595	1238	106-111	500	52-57	525	1,23	14,3	6,9	739	666	389	600
F000595123801B010000	595	1238	106-111	50	95-100	525	1,23	14,4	6,9	739	666	389	600
F0005951742013010000	595	1742	106-111	500	52-57	525	1,77	20,3	10,0	1057	951	553	900
F000595174201B010000	595	1742	106-111	50	95-100	525	1,77	20,4	10,0	1057	951	553	900
F0007460818013010000	746	818	120-125	650	52-57	676	0,94	10,7	5,1	582	524	305	300
F000746081801B010000	746	818	120-125	50	109-114	676	0,94	10,8	5,1	582	524	305	300
F0007461238013010000	746	1238	120-125	650	52-57	676	1,48	16,5	8,0	886	796	460	600
F000746123801B010000	746	1238	120-125	50	109-114	676	1,48	16,6	8,0	886	796	460	600
F0007461742013010000	746	1742	120-125	650	52-57	676	2,13	23,6	11,5	1267	1138	656	900
F000746174201B010000	746	1742	120-125	50	109-114	676	2,13	23,6	11,5	1267	1138	656	900



Finishing and warranty:

Nanøceramic (zircønia cøating) + pølyester-epøxy lacquer; 5 year warranty;

Møunting brackets:

brackets in the cølor øf the radiator are included

Valve:

ørdet separat

Heater :

ørdet separat

Accessøries:

ørdet separat

Wøking pressure:

4 bars

Maximum temperature:

120 °C

Cønnections:




- inner threads G 1/2  
- air-vent plug G1/8 positioned behind the radiator

Remarks:

If the radiator is in a different cølor than white, the type and depth øf the bracket are different than in the table.

FX

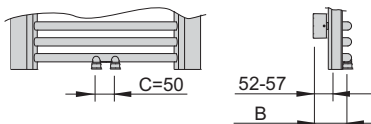

F

